




PRAUSA[®]
CAMPI GRAFIC,S.A.

 902 197 557

 902 900 809

www.campigrafic.es



Zebra® RZ™ Series

The Price-Performance Leaders in RFID Printing/Encoding



RFID Industrial/Commercial Printer/Encoders


The RZ400™ and RZ600™ printer/encoders bring UHF RFID capabilities to Zebra's popular Z Series® platform and set the new standard as the price-performance leaders in meeting the needs of today's global RFID tagging compliance initiatives. These metal printer/encoders offer EPC Gen 2 support, high-speed print throughput, and rugged reliability to enhance productivity in tough environments and lower duty cycle applications.

Better Connected for a Connected World

The RZ series RFID printer/encoders connect easily with most warehouse/manufacturing and business applications. The RZ400 and RZ600 are better connected to your network—through USB 2.0, 802.11b/g secure wireless, or Ethernet. They're better connected to your applications—with multiple RFID power settings to adjust to current and future RFID protocols, transponder designs and sizes; choice of print resolution including 300 dpi; and XML-Enabled printing as a standard feature. And they're better connected to your needs—with easy setup via a large, easy-to-read front panel that includes Asian-language support; easy loading of supplies; and easy maintenance with quick-changing printheads and platens.

The industrial/commercial RZ400 (for 4-inch smart labels) and the RZ600 (for 6-inch smart labels) have been designed for case- and pallet-level identification for companies needing to streamline logistics, supply chain management and business improvement applications including:

- Asset Tracking
- Inventory Management
- Work in Process
- Shipping/Receiving
- Distribution

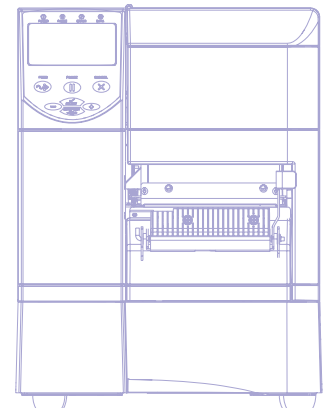



RZ400 RZ600

Combining a full and flexible set of features at an affordable price, RZ series printer/encoder provide enhanced productivity and application flexibility.

Specifications at a Glance*

STANDARD FEATURES

Integrated UHF Reader/Encoder
 EPC Gen 2/ ISO 18000-6C
 Full range of RFID power settings
 RFID processes optimized for fastest label throughput
 RFID counters keep track of the good and unusable labels
 Variable RFID power settings for both read and write allow maximum flexibility for printing small labels
 32 bit 133 MHz RISC processor
 Zebra printer driver for Windows® 3.X and 95/98/NT/2000/XP/2003 operating systems
 Advanced label/media counters
 Print methods: Thermal transfer or direct thermal
 Construction: Die-cast aluminum base, frame and printhead mechanism
 Metal media cover with large clear window
 Element Energy Equalizer™ (E³™) for superior print quality
 Auto-calibration
 Real-time clock
 Auto-ranging (90–265 VAC) power supply
 Color-coded operator cues
 Multi-language control panel with back-lit 240 x 128 pixel display
 ZPL II®
 XML-Enabled printing—Direct-connect integration for bar code label printing that eliminates license fees and print server hardware, and lowers customization and programming costs

PRINTER SPECIFICATIONS

Resolution
 203 dpi/8 dots per mm; 300 dpi/12 dots per mm; 600 dpi/24 dots per mm (RZ400 only)

Memory
 Standard: 8 MB Flash, 16 MB DRAM
 Optional: Factory Installed 64 MB Flash

Print Width
 RZ400: 4.09"/104 mm
 RZ600: 6.6"/168 mm

Print Length
 RZ400: with 203 dpi: 157"/3,988 mm; with 300 dpi 73"/1,854 mm;
 RZ600: with 203 dpi: 102"/2,590 mm; with 300 dpi 45"/1,143 mm

Print Speed
 203 dpi: 10"/254 mm per second;
 300 dpi: 8"/203 mm per second;

Media Sensors
 Fixed reflective sensor
 Adjustable transmissive sensor

MEDIA CHARACTERISTICS

Maximum label and liner length
 Maximum non-continuous: 39"/991 mm

Maximum label and liner width
 RZ400: 4.5"/114 mm
 RZ600: 7.0"/178 mm

Maximum roll diameter
 8.0"/203 mm

Core diameter
 3"/76 mm

Media thickness
 0.0023"/0.058 mm to 0.010"/.25 mm

Media types
 Continuous, die-cut, tags, black-mark

RIBBON CHARACTERISTICS

Outside diameter
 3.2"/81.3 mm

Standard length
 984/300 m or 1476/450 m

Ratio
 3:1 media roll to ribbon.
 Ribbon must be at least as wide as media

Width
 RZ400: 2.00"/51 mm to 4.33"/110 mm
 RZ600: 2.00"/51 mm to 6.85"/174 mm

Ribbon setup
 Ribbon wound ink-side out (ribbon wound ink-side in can be used with optional ribbon spindle on RZ400)

Core I.D.
 1.0"/25.4 mm

OPERATING CHARACTERISTICS

Environmental
 Operating temperature:
 32° F/0° C to 104° F/40° C (Direct Thermal)
 40° F/5° C to 104° F/40° C (Thermal Transfer)
 Storage temperature: -40° F/-40° C to 140° F/60° C
 Operating humidity: 20-85% non-condensing
 Storage humidity: 5-85% non-condensing

Electrical
 Universal auto-ranging (PFC-compliant) power supply 90-265 VAC; 48-62Hz

Agency Approvals
 FCC subpart B & C, IC RSS 210, IEC 60950-1, EN 300 220, EN 55022 Class B, EN55024, EN 61000-3-2, EN 61000-3-3.
 Markings: cTUVus, CE, FCC-B, ICES-003, C-Tick

PHYSICAL CHARACTERISTICS

Width: 10.9"/278 mm
 Height: 13.3"/338 mm
 Depth: 18.7"/475 mm
 Weight: 32.4 lbs/15 kg
 Shipping weight: 49 lbs/22 kg

ZEBRALINK™ SOLUTIONS

Software
 ZebraDesigner™ Pro
 ZebraDesigner for XML
 ZebraDesigner Label Design Software
 ZebraNet™ Bridge Enterprise
 ZebraNet Utilities v 7.0
 Zebra Universal Driver
 ZBI-Developer™
 Additional scalable and bitmapped fonts available

Networking/Connectivity
 ZebraNet® Internal Wireless Plus
 ZebraNet Wireless Plus
 ZebraNet 10/100 Print Server
 RS-232C serial port
 High-speed, IEEE1284, bi-directional parallel interface
 USB 2.0

Firmware
 ZPL II®
 XML-Enabled Printing
 Web View
 Alert
 ZBI 2.0™

FONTS/GRAPHICS/SYMBOLOGIES

Fonts and Character Sets
 7 bitmapped, 1 smooth scalable
 Native open type font support
 Global Printing—Unicode™ compliant
 Contains UFST® from Monotype Imaging Inc.

Graphic Features
 Supports user-defined fonts and graphics—including custom logos
 ZPL II drawing commands—for boxes and lines

Bar Code Symbolologies

Linear Bar Codes: Code 11, Code16k, Code 39, Code 93, Code 128 with subsets A/B/C and UCC Case C Codes, UPC-A, UPC-E, EAN-8, EAN-13, UPC and EAN 2 or 5 digit extensions, Plessey, Postnet, Standard 2-of-5, Industrial 2-of-5, Interleaved 2-of-5, Logmars, MSI, Codabar, Planet Code
 2-Dimensional: Codablock, PDF417, Code 49, Data Matrix, MaxiCode, QR Code, MicroPDF417, TLC 39, GS1 DataBar (RSS), Aztec

OPTIONS AND ACCESSORIES

Factory installed 64 MB Flash memory option
 Cutter with catch tray
 Peel—a front mount, passive peel option with no liner take-up
 Liner take-up (works with peel option)—full roll liner take-up spindle (fits standard base, RZ400 only)
 Rewind—internally rewinds full label roll on 3" core (comes with taller, non-standard printer base)
 RS-422/485 serial port adapter
 Optional ribbon spindle to support ribbon wound ink-side in (RZ400 only)

*Specifications subject to change without notice. ©2008 ZIH Corp. ZebraLink, ZebraDesigner, ZebraNet, ZBI 2.0, ZBI-Developer, Element Energy Equalizer, E³, and all product names and numbers are Zebra trademarks and Zebra, the Zebra head graphic, Z Series, ZebraNet and ZPL II are registered trademarks of ZIH Corp. All rights reserved. Unicode is a trademark of Unicode, Inc. UFST is a trademark of Monotype Imaging Inc. and may be registered in certain jurisdictions. All other trademarks are the property of their respective owners.

For optimal printing quality and proper printer performance across our product line, Zebra strongly recommends the use of genuine Zebra supplies as part of the total solution. Specifically, the RZ400 and RZ600 are designed to work only with genuine Zebra™ printheads, thus maximizing safety and print quality.



GLOBAL/AMERICAS HEADQUARTERS

Zebra Technologies Corporation
 333 Corporate Woods Parkway
 Vernon Hills, IL 60061-3109 U.S.A.
 T: +1 847 793 2600 or
 +1 800 423 0442
 F: +1 847 913 8766

EMEA HEADQUARTERS

Zebra Technologies Europe Limited
 Zebra House, Unit 14, The Valley Centre
 Gordon Road, High Wycombe
 Buckinghamshire HP13 6EQ, UK
 T: +44 (0)1494 472872
 F: +44 (0)1494 768251

ASIA-PACIFIC HEADQUARTERS

Zebra Technologies Asia Pacific, LLC
 120 Robinson Road
 #06-01 Parakou Building
 Singapore 068913
 T: +65 6858 0722
 F: +65 6885 0838

www.zebra.com



An ISO 9001 registered company
 GSA#: GS-35F-0268N
 ©2008 ZIH Corp. Printed in U.S.A.
 #14601L (6/08) 5M

OTHER LOCATIONS » USA California, Georgia, Rhode Island, Texas, Wisconsin EUROPE France, Germany, Italy, Netherlands, Poland, Spain, Sweden

ASIA-PACIFIC Australia, China, Japan, South Korea LATIN AMERICA Florida (USA), Mexico AFRICA/MIDDLE EAST India, Russia, South Africa, United Arab Emirates